


OT Security Concept – Kestrel Ridge Wind Farm

Katarzyna Nowak · 14 September 2026 · WE-ISMS-CON-009

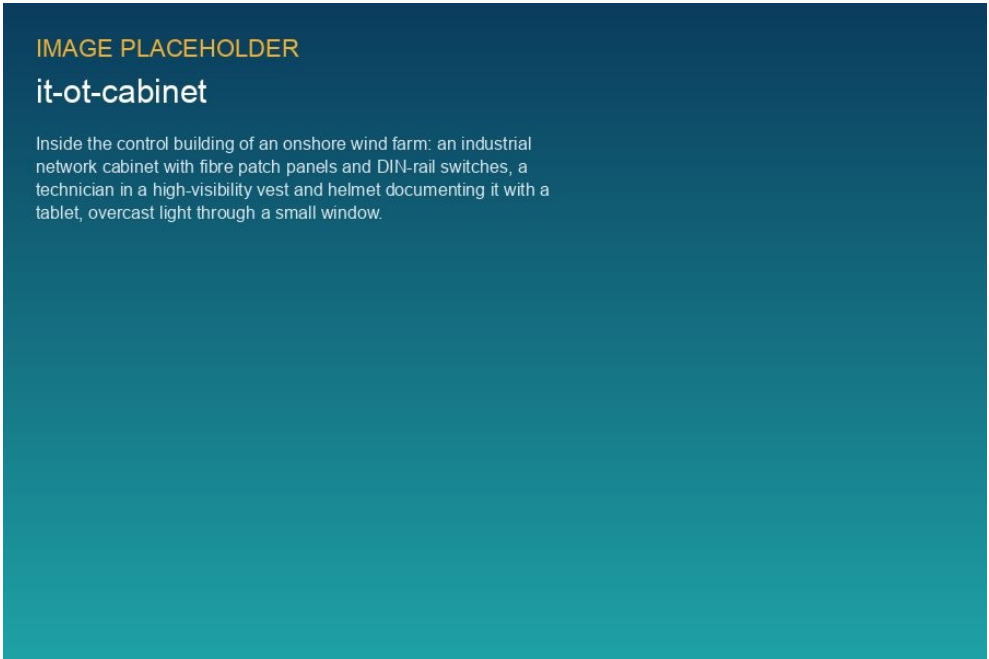

Network cabinet in the Kestrel Ridge control building

Current state

The 18 turbines (T-01 ... T-18) and the substation are connected via a fibre ring to the control building. Today the SCADA network and the site office network share one firewall; remote access by Highline Wind Services and the turbine OEM uses separate VPNs without central logging.

Target architecture (IEC 62443 zones)

Zone	Contents	Conduit
Z1 Turbine control	Turbine controllers (OEM)	Only via Z2
Z2 SCADA	SCADA server, historian	Firewall to Z3 and DMZ
Z3 Site office	Laptops, printer, CCTV	Internet via Edinburgh
DMZ remote access	Jump host with MFA and session recording	Vendors, Edinburgh control room

Plan

- Dedicated OT firewall pair – delivery delayed, installation 27 November 2026
- Central remote access via jump host; vendor VPNs switched off by 31 December 2026
- Logs forwarded to the Northlight SOC
- Annual OT penetration test from 2027